



# Toshiba Satellite M55-S135 Optical Drive Replacement

Remove and replace the optical drive on your Toshiba Satellite.

Written By: Yuheng Huang



## INTRODUCTION

This guide will illustrate how to replace the optical drive in your Toshiba Satellite.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — RAM



- Orient the laptop so that it is closed, faced down and has the battery facing away from you.
- Use the Phillips 00 screwdriver to remove the 7.50mm screw from the panel.



## Step 2



- ⚠ Carefully remove the cover to reveal the RAM compartment.



## Step 3

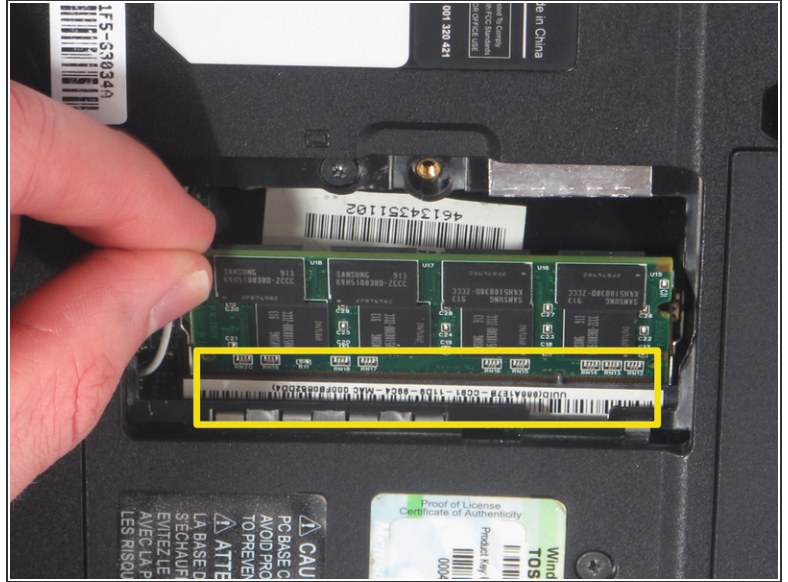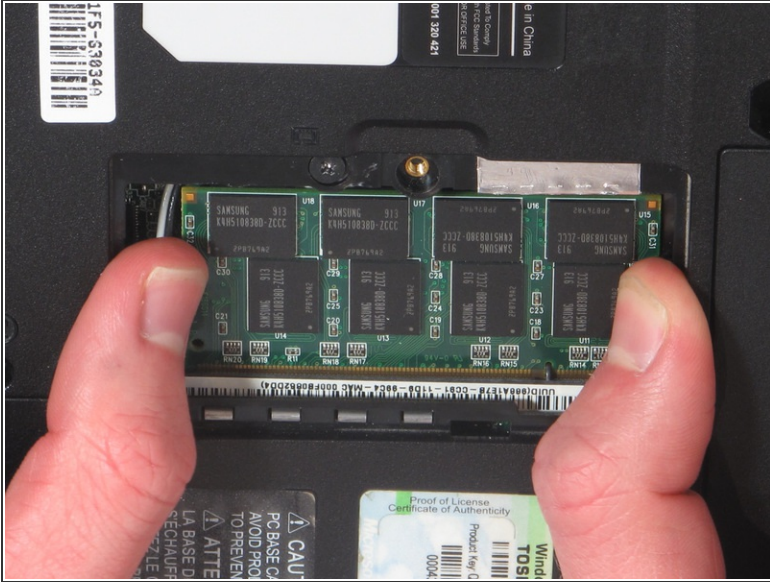

- Rotate the laptop 90 degrees clockwise.
- Pull back the two silver clips that hold the RAM in place.
- Gently pull the RAM out of the slot and lift up to remove the RAM from the laptop.

## Step 4 — Optical Drive



- Use the Phillips #00 screwdriver to remove the 6.5mm screw holding the gray metal bracket in place.

## Step 5



- ❗ Turn the laptop 180 degrees then tilt the near side up.
- Push the back side of the optical drive out of the laptop using the plastic opening tool.

## Step 6



- Pull the optical drive out of the laptop using your fingers.

## Step 7



- Using the Phillips 00 screwdriver, unscrew the two 2.50mm screws that connect the metal bracket to the optical drive.
- Remove the bracket from optical drive.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-08 09:08:24 AM.